




LG Motion 4G MS770 Rear Facing Camera Replacement

Replacing the rear facing camera.

Written By: Zarna Patel

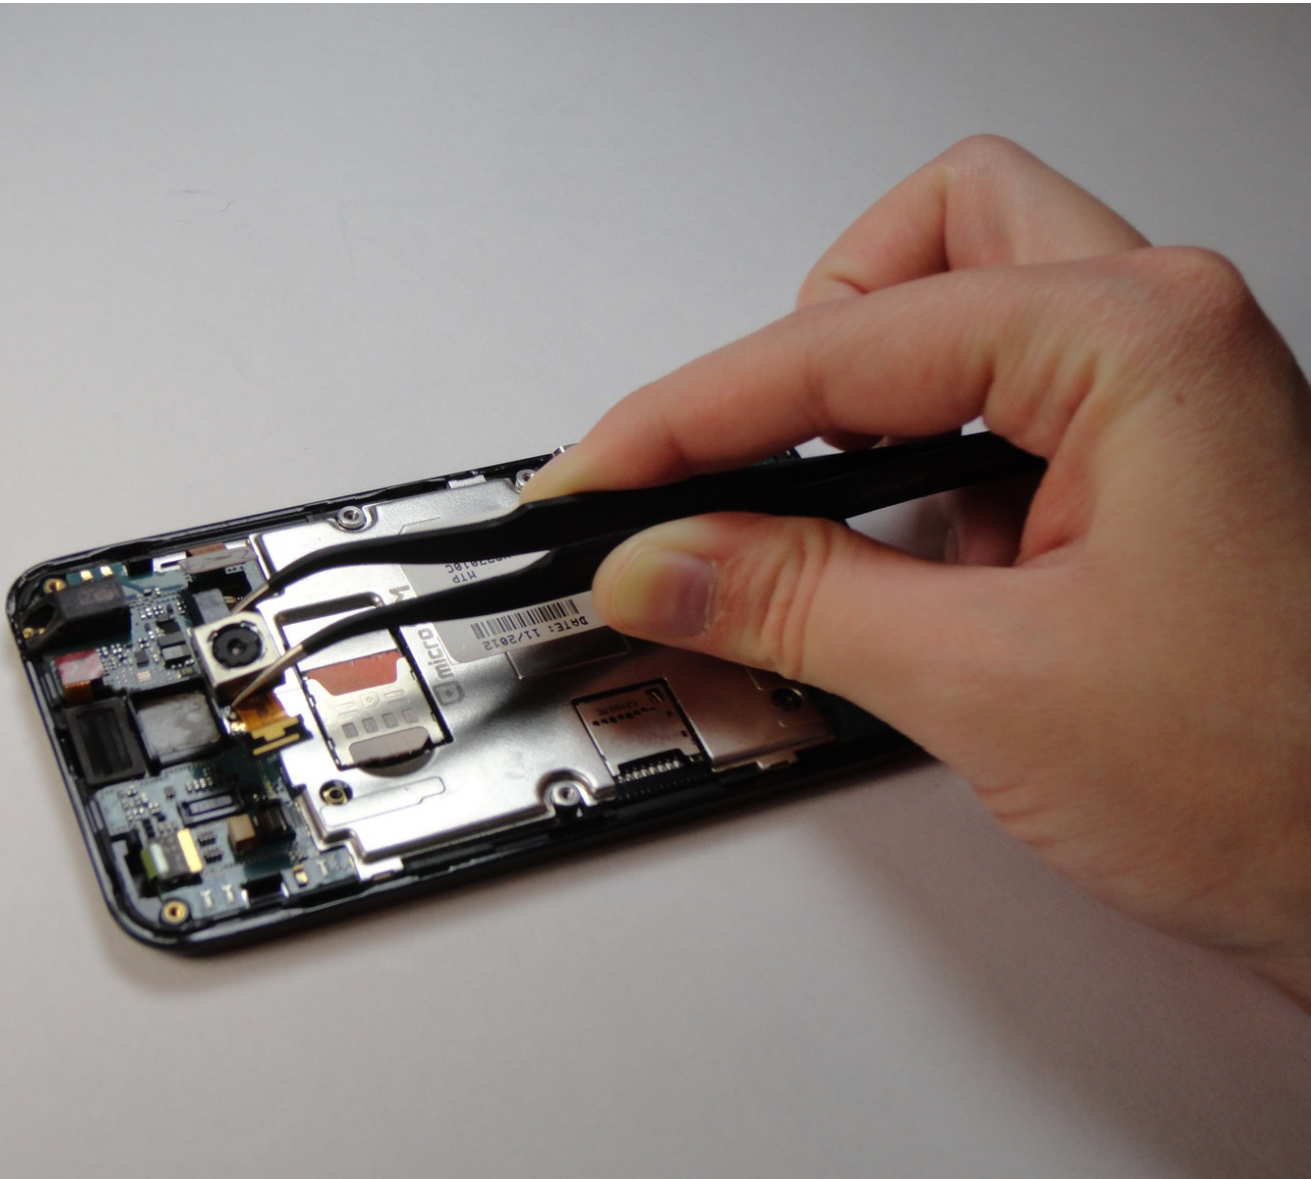

INTRODUCTION

Replacing the rear facing camera that is malfunctioning or has a cracked lens and is unusable.



TOOLS:

- [iFixit Opening Tools](#) (1)
 - [Phillips #00 Screwdriver](#) (1)
 - [Tweezers](#) (1)
-

Step 1 — Remove the phone's back cover.



- Use a plastic opening tool to remove the back cover.

Step 2 — Remove the battery.



- Use a plastic opening tool to remove the battery, lifting from the bottom right corner.

Step 3 — Remove screws.





- Use a Phillips #00 Screwdriver to remove all eight 4mm screws.

Step 4





- Use a plastic opening tool to remove the back trim by working around all of the edges.

Step 5

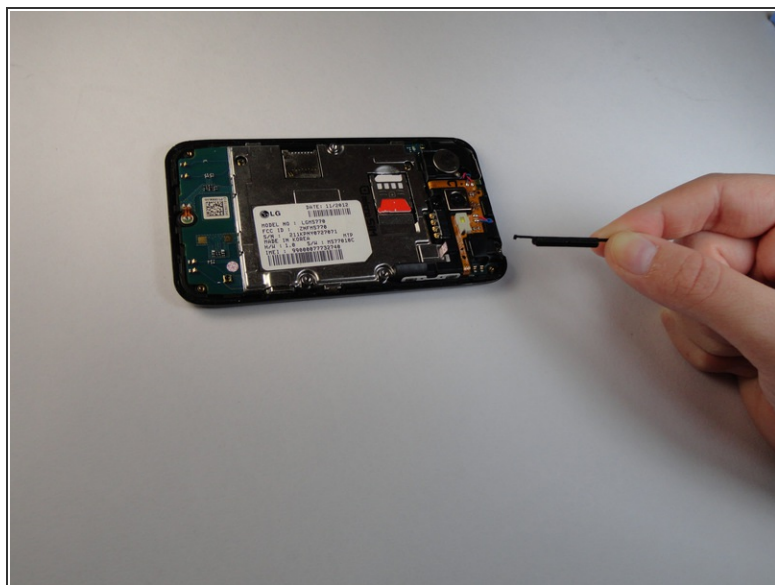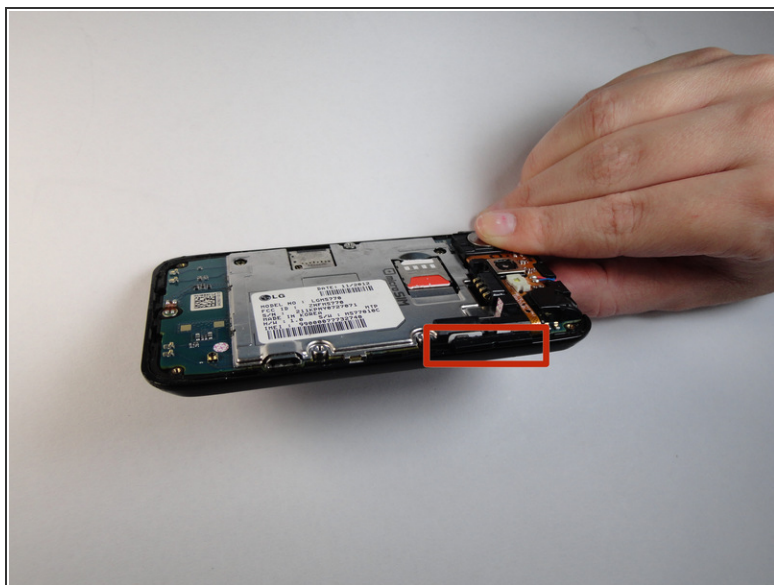

- Remove the volume buttons from the side.


Step 6 — Speaker

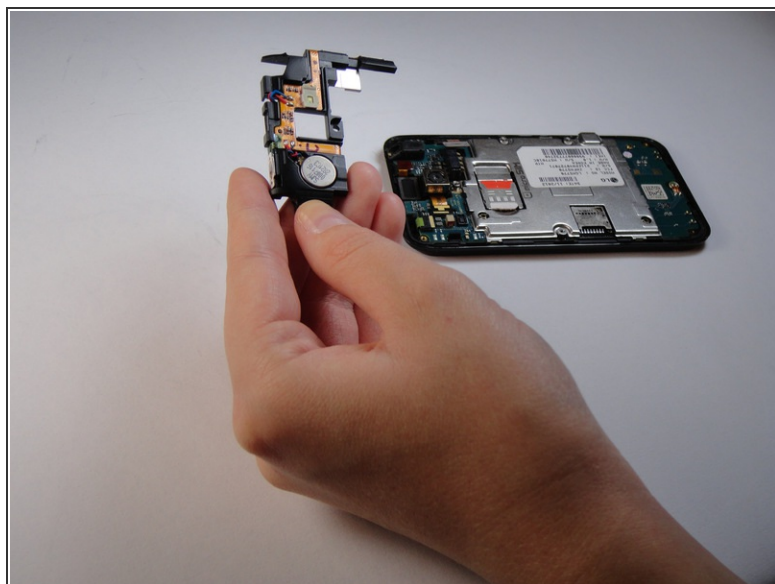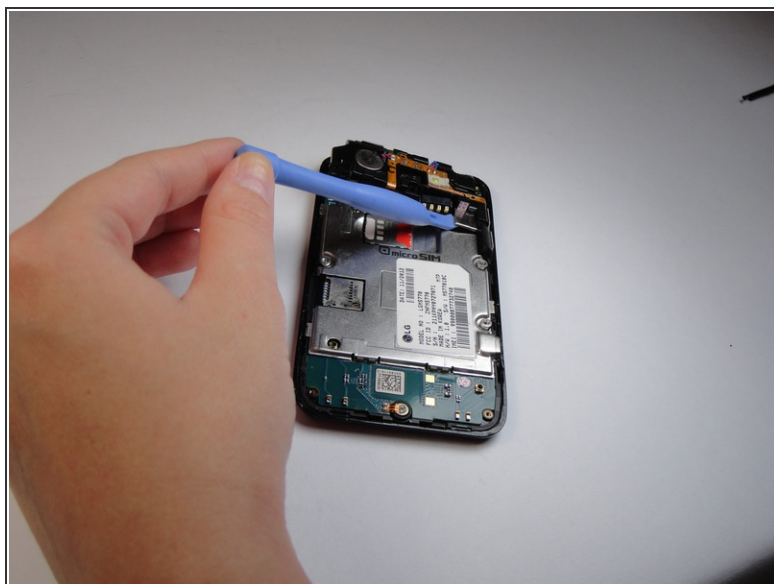

- Use a plastic opening tool to lift the speaker off by prying under the silver square as shown.


(i) Note: There is a small tab underneath the speaker that will be lifted off when the speaker is removed.

Step 7 — Rear Facing Camera

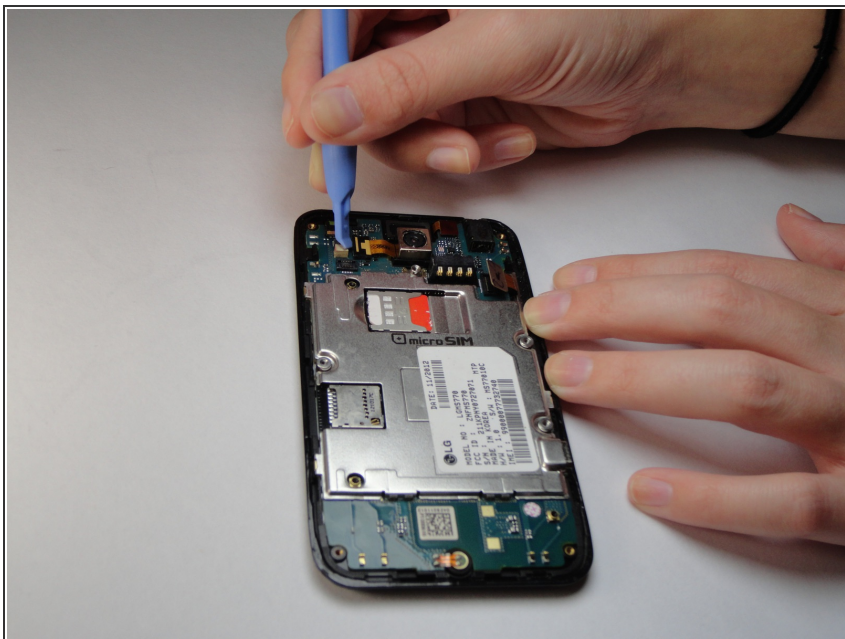

- Pry slightly underneath the tab attached to the camera until it pops off.

Step 8

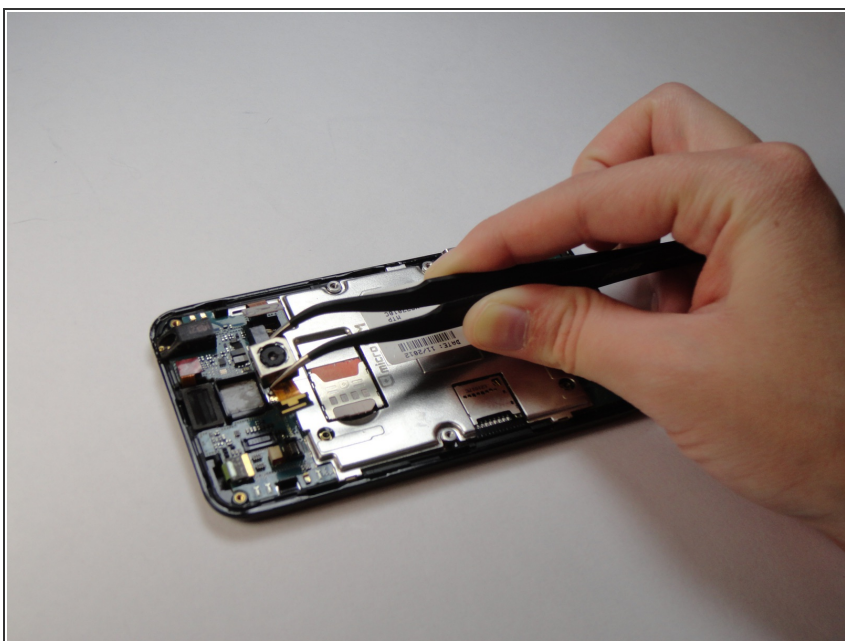

- Use tweezers to remove the camera, you will need to use some force as it is glued on.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-18 10:26:50 PM.